
Do wetland or denitrifying bioreactor systems designed to remove nitrate lead to pollution swapping?

Priscila Simon & Cecile de Klein

February 2021



Report for Dairy NZ Ltd.

Client Report Number: RE450/2020/100

This report has been prepared for DairyNZ Ltd. ,and is confidential to DairyNZ Ltd. and AgResearch Ltd. No part of this report may be copied, used, modified or disclosed by any means without their consent.

Every effort has been made to ensure this Report is accurate. However scientific research and development can involve extrapolation and interpretation of uncertain data and can produce uncertain results. Neither AgResearch Ltd nor any person involved in this Report shall be responsible for any error or omission in this Report or for any use of or reliance on this Report unless specifically agreed otherwise in writing. To the extent permitted by law, AgResearch Ltd excludes all liability in relation to this Report, whether under contract, tort (including negligence), equity, legislation or otherwise unless specifically agreed otherwise in writing.

Contents

1. Executive Summary	1
2. Introduction	2
2.1 Background	2
2.2 Objectives	3
3. Method	4
3.1 Literature review	4
3.1.1 <i>Constructed wetlands</i>	4
3.1.2 <i>Natural wetlands</i>	4
3.1.3 <i>Denitrifying bioreactors</i>	4
3.2 Estimating nitrous oxide emission factors	5
4. Results and Discussion	6
5. Conclusions	10
6. Acknowledgements	10
7. References	10
8. Appendix	13

1. Executive Summary

The use of wetlands (natural and constructed) and denitrifying bioreactors within agricultural catchments can reduce nitrate losses (Schipper et al. 2010). A potential unintended consequence of using these systems is that nitrous oxide emissions may increase, given that the process of nitrate removal (denitrification) is also a pathway for nitrous oxide production. However, nitrate that is lost to water can subsequently be emitted as nitrous oxide from waterbodies (groundwater, rivers, estuaries). Therefore, wetlands and bioreactors will only cause pollution swapping (an increase in one pollutant as a result of a measure introduced to reduce a different pollutant), if the proportion of nitrate that is lost as nitrous oxide in these structures (the nitrous oxide emission factor) is greater than the nitrous oxide emission factor for nitrate that had already entered waterbodies.

The purpose of this review was to assess the potential for pollution swapping between nitrate and nitrous oxide loss from wetlands and denitrifying bioreactors in agricultural systems. We undertook a literature review to collate data and information from peer-reviewed publications where nitrous oxide emissions from these systems were measured. We then compared the measured or estimated nitrous oxide emission factors from wetlands and denitrifying bioreactors with the nitrous oxide emission factor values used in global and national methodologies for estimating nitrous oxide emissions. The Intergovernmental Panel on Climate Change (IPCC) and the New Zealand Inventory recommend an emission factor (EF_5) for nitrous oxide emissions from waterbodies of 0.75% (IPCC 2006), although a recent revision of international greenhouse gas inventory guidelines has suggested an EF_5 of 1.1 % (IPCC 2019). This emission factor includes three components: EF_{5g} , EF_{5r} and EF_{5e} representing emissions from ground water and surface drainage, rivers and estuaries, respectively. For the IPCC 2006 EF_5 value of 0.75% each component contributes 0.25%, while for the IPCC 2019 EF_5 value of 1.1% the components contribute 0.6 % (g), 0.25% (r) and 0.25% (e) (IPCC 2019).

To our best knowledge, there have been no New Zealand studies measuring nitrous oxide emissions from wetlands within agricultural catchments, and only a few studies measuring nitrous oxide emissions from denitrifying bioreactors. Our study is, therefore, mainly based on results from the international literature. Studies of nitrous oxide emissions from natural wetlands represented the smallest number of studies found in the literature (7 studies), compared with studies on constructed wetlands (22 studies) and denitrifying bioreactors (11 studies).

We reviewed N_2O emission and emission factors from the structures themselves, but also estimated an overall EF_5 value, by including N_2O emissions from rivers and estuaries (each at 0.25%) for any nitrate that was not removed in the systems. We either used the nitrate reduction rates measured in the different studies, or, for studies where the nitrate reduction rate was not provided, assumed an average NO_3^- reduction efficiency of 70%.

The main findings of this review were:

- The majority of the nitrous oxide emission factors reported for wetlands and denitrifying bioreactors were below the 0.75% IPCC value for nitrous oxide emissions from leached nitrate.
- Denitrifying bioreactors were the only systems for which a number of studies reported values above 1.1%. These were all from laboratory studies with high rates of nitrate inflow.

- Natural wetlands had the lowest nitrous oxide emissions, with EF_{5g} values ranging from 0.08 to 0.55% (median value of 0.19%), followed by constructed wetlands from 0.003 to 1.15% (median value of 0.10%) and denitrifying bioreactors with EF_{5g} values ranging from 0.003 to 1.4% (median value of 0.29%).
- However, when estimating an overall $EF_{5(g+r+e)}$, by using the measured or assumed nitrate reduction rates, the lowest emissions were from constructed wetlands with values ranging from 0.004 to 1.5 (average 0.21 and median 0.11), followed by natural wetland, ranging from 0.14 to 0.94 (average 0.41 and median 0.39), and bioreactors, ranging from 0.15 to 1.6 (average 0.58 and median 0.51).

The results of our review suggest that the potential for pollution swapping in wetlands and denitrifying bioreactors is unlikely.

2. Introduction

2.1 Background

To reduce risks of nitrate leaching to water, landowners could consider protecting or installing wetlands and denitrifying bioreactors that can remove nitrate from water via denitrification, a biological process that converts nitrate into gaseous nitrogen (N) forms. The two main gases released through denitrification are environmentally benign dinitrogen gas (N_2), and the greenhouse gas nitrous oxide.

Natural and constructed wetlands intercept and process nitrate in surface or subsurface flow from pasture as it is transported towards streams. There have been numerous studies that have demonstrated that riparian wetlands can remove large amounts ($> 100 \text{ kg N ha}^{-1} \text{ y}^{-1}$) of nitrate -N and most studies suggest that denitrification is the mechanism responsible (Hill 1996; Cooke et al. 2018).

Denitrifying bioreactors vary in their designs according to the solid carbon (C) sources utilized (e.g. woodchips, cardboard and pine needles), the hydrologic connection between water containing nitrate and C source, and the ratio of source area: treatment area (Schipper et al. 2010). Bioreactors can be classified into denitrification walls and denitrification beds.

Denitrification walls are systems where solid C material is incorporated vertically into shallow groundwater perpendicular to the flow. Darcian flow, saturated hydraulic conductivity, hydraulic gradient and the flow paths intercepted by the walls, are factors which control the flux of nitrate into the walls (Robertson & Cherry 1995; Schipper et al. 2010).

Denitrification beds are compartments that are filled with wood chips and receive nitrate in concentrated discharges either from a range of wastewaters (Schipper et al. 2010) or tile/drain discharge (Robertson & Merkley 2009). Denitrification beds can also be installed into existing stream beds or drainage ditches and are specifically referred to as “stream bed bioreactors” (Robertson & Merkley 2009). The source area: treatment area ratio for beds is usually much greater than in wall designs, due to either natural or artificial drainage networks that intercept and funnel groundwater inputs to the bioreactor. Retention and creation of wetlands and denitrifying bioreactors within agricultural landscapes are promoted as a means of reducing the nitrate load to surface waters (Cooke et al. 2018). Given that the nitrate removal process, denitrification, can result in

nitrous oxide emissions, there is a risk of pollution swapping. However, as nitrate can also denitrify to nitrous oxide once it is in a waterbody (groundwater, rivers, estuaries; Figure 1), wetlands and bioreactors will only cause pollution swapping if the proportion of nitrate that is denitrified in these structures is greater than that in waterbodies.

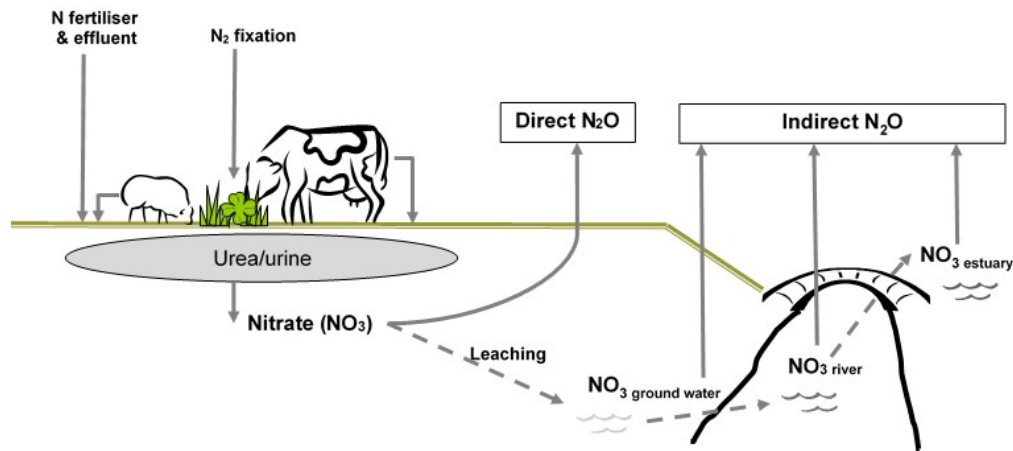


Figure 1: Schematic representation of direct and indirect nitrous oxide emissions from leached N. (adapted from de Klein et al. (2008)).

Under current inventory frameworks, estimates of a farm's nitrous oxide emissions include emissions that occur from nitrate *after* it is lost from the farm through leaching. This is referred to as an *indirect* source of nitrous oxide. The emission factor used to estimate these indirect emissions is known as EF₅ and incorporates three components (Figure 1): an emission factor for groundwater and surface drainage (EF_{5g}), an emission factor for rivers (EF_{5r}), and an emission factor for estuaries (EF_{5e}).

The value for EF₅ used in New Zealand's inventory methodology is 0.75% (% nitrous oxide-N lost per unit of nitrate-N leached), with the three components contributing 0.25% each (MfE 2020). A recent revision of international greenhouse gas inventory guidelines suggests that EF₅ is 1.1 %, with EF_{5g}, EF_{5r} and EF_{5e} contributing 0.6, 0.26 and 0.26% respectively (IPCC 2019). Therefore, if the nitrous oxide emission factor of wetlands or denitrifying bioreactors is equal to or less than 1.1% of the N entering these structures, then any nitrous oxide produced from intercepted nitrate is not additional to the farm's total direct and indirect nitrous oxide emissions, and does not result in any pollution swapping. However, if the emission factor is greater than 1.1% pollution swapping will occur. There is a need to quantify the nitrous oxide emission factor of wetlands and denitrifying bioreactors ensure any pollution swapping can be assessed.

2.2 Objectives

The aims of this project were:

1. Provide a summary of the literature on nitrous oxide emissions from wetlands and denitrifying bioreactors, and a summary of the basis for the 0.75% emission factor used in the NZ Inventory, and relevance of updated IPCC value (1.1%).

2. For published studies that provide the results as 'emission factors' or provide enough information for EF₅ to be calculated, compare the nitrous oxide emission factors from wetlands or denitrifying bioreactors with the IPCC default emission factor for N that is lost to waterways.
3. If the nitrous oxide emission factors of wetlands or denitrifying bioreactors are greater than 0.75% or 1.1%, assess the increase in emissions relative to the total nitrous oxide losses from other on-farm activities and the farm enterprise.
4. Provide a description of the methodology used and assumptions made
5. Provide a 1-2 page 'farmer-friendly' summary of findings specifically addressing farmer concerns regarding pollution swapping.

3. Method

3.1 Literature review

The data were collected from studies published and reported in the database "Scopus - multidisciplinary" indexed by Elsevier. The key words searched were: ("Wetlands", "Natural wetlands", "Constructed wetlands", "Denitrifying bioreactors", "Bioreactors", "Denitrification beds", "Nitrous oxide", "N₂O", "Nitrate leaching", "Pollution swapping").

Data originated from studies that, (i) used constructed wetland, (ii) natural wetlands or (iii) denitrifying bioreactors to reduce nitrate leaching, and also had measured losses of nitrous oxide. The studies were separated by system, as described below:

3.1.1 *Constructed wetlands*

Studies undertaken in wetlands constructed under 3 different designs: VSSF (Vertical subsurface flow), HSSF (Horizontal subsurface flow), and FWS (Free water surface) constructed wetlands.

3.1.2 *Natural wetlands*

Studies undertaken in natural riparian wetlands with measurements of surface nitrous oxide fluxes.

3.1.3 *Denitrifying bioreactors*

Field and laboratory studies with different designs (denitrification beds or denitrification walls), using woodchip as the C substrate. Studies evaluating different C substrates (woodchips, cardboard, pine needles or barley straw), under distinct hydraulic retention times (HRTs) (2, 3, 8, 5 or 10 hours) were also reviewed. Unfortunately, these studies did not provide enough information to calculate EF values and we could therefore not use them for the current assessment. However, for completeness, we have included a summary of the results as an appendix.

3.2 Estimating nitrous oxide emission factors

When emission factors were not provided in the publications, values were estimated based on the measured nitrous oxide emission and other information provided. For estimating EF values, we calculated the proportion of cumulative nitrous oxide loss as a proportion of the amount of nitrate that entered the system. This included both the amount of nitrous oxide emitted to the atmosphere (surface fluxes) as well as nitrous oxide that was diluted in water leaving the wetland or bioreactor:

EF₅ wetland/bioreactor =

$$[(\text{nitrous oxide-N}_{\text{emitted}} + \text{nitrous oxide-N}_{\text{diluted}})/\text{nitrate-N}_{\text{in}}] \times 100. \quad (\text{Eq. 1})$$

The various studies presented the nitrous oxide fluxes in different units, and we therefore converted the results to standardised units (mg N/m²/h; g N/m²/d or mg N/L). For the studies where there was not enough information provided to estimate the nitrous oxide EF, we recorded the results as presented in the paper, i.e. the amount of nitrous oxide emitted from the surface, or the concentration of nitrous oxide diluted in water, and proportion of nitrous oxide lost from the nitrate removed.

Since wetlands and bioreactor systems generally do not denitrify the total amount of nitrate entering the system, in studies where the rate of nitrate reduction was provided, we estimated the potential losses of nitrous oxide downstream (rivers and estuaries, EF_{5r,e}). When the nitrate reduction rate was not provided, we considered an average value of 70% for these systems.

When the rate of nitrate reduction was provided, the EF_{5r,s} is estimated as follows:

kg nitrous oxide-N downstream =

$$[\text{EF}_{5r,e} (0.005) \times (\text{kg nitrate-N}_{\text{in}} - \text{kg nitrate-N}_{\text{removed}})] \quad (\text{Eq. 2.1})$$

When the rate of nitrate reduction was not provided, the EF_{5r,s} is estimated as follows:

kg nitrous oxide-N downstream =

$$[\text{EF}_{5r,e} (0.005) \times (\text{kg nitrate-N}_{\text{in}} - (\text{kg nitrate-N}_{\text{in}} \times 0.70))] \quad (\text{Eq. 2.2})$$

To estimate the overall EF₅, we then added the estimated cumulative nitrous oxide emissions downstream to the nitrous oxide cumulative emissions/diluted from wetlands/bioreactors and divided it by the total amount of nitrate-N entering the system (equation 3):

EF₅=

$$[(\text{kg nitrous oxide-N}_{\text{wet/bior}} + \text{kg nitrous oxide-N}_{\text{downstream}})/ \text{kg nitrate-N}_{\text{in}}] \times 100 \quad (\text{Eq.3})$$

4. Results and Discussion

The results obtained from this literature review show that nitrous oxide emissions from the systems increased in the following order: natural wetlands, ranging from 0.08 to 0.55% (Table 1), followed by constructed wetlands (0.003 to 1.1%; Table 2), and denitrifying bioreactors (0.003 to 1.4%; Table 3). When estimating the overall $EF_{5(g+r+e)}$, by using either the measured or assumed nitrate reduction rates, the lowest emissions were from constructed wetlands with values ranging from 0.004 to 1.5 (average 0.21 and median 0.11), followed by natural wetland, ranging from 0.14 to 0.94 (average 0.41 and median 0.39), and bioreactors, ranging from 0.15 to 1.6 (average 0.58 and median 0.51).

Studies of nitrous oxide emissions from natural wetlands represented the smallest number of studies found in the literature (7 studies), followed by denitrifying bioreactors (12 studies) and constructed wetlands (16 studies). Of the bioreactor studies, 8 included measured EF values, and 4 studies only measured cumulative emissions. The literature data are summarised in Figure 2.

The majority of the indirect nitrous oxide emission factors found in the three systems were below the 0.75% IPCC EF_5 value for indirect nitrous oxide emissions from nitrate leaching. Denitrifying bioreactor was the only system where a few studies observed EF_5 values above 0.75% (Figure 2).

The boxplot comparisons demonstrate that the overall EF_5 for both natural and constructed wetland systems all (but two outliers) were below IPCC EF_5 values (0.75 or 1.1%). For the bioreactor studies, the data presented a large variability, with some overall EF_5 values above the 0.75% and 1.1% IPCC values. However, the majority of the results are under the 0.75% EF_5 . This suggests that although the use of bioreactors can vary in terms of effectiveness, it is unlikely that the indirect nitrous oxide emissions from this system will be above the IPCC 2019 default of 1.1%, and with a low chance to be above the 0.75% IPCC 2006.

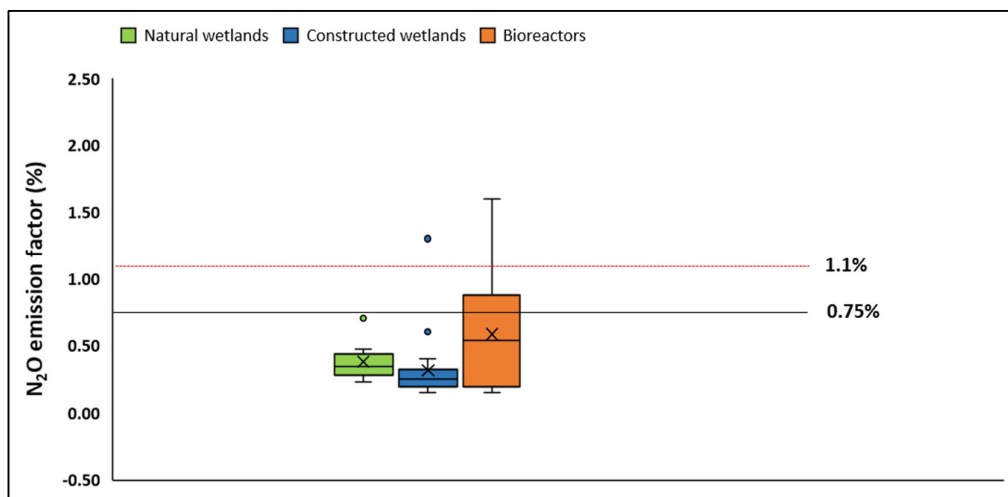


Figure 2: Average nitrous oxide emission factors ($EF_{5(g+r+e)}$) from bioreactors, constructed wetlands and natural wetlands collected from 8, 16 and 7 studies, respectively. The nitrous oxide EFs from wetlands and bioreactors are compared with the IPCC default values (EF_5) of 0.75% (IPCC 2006) and the revised value of 1.1% (IPCC 2019) for indirect nitrous oxide emissions from nitrate leaching.

Table 1. Summary of published results on inflow nitrate-N loading, nitrous oxide emissions and the nitrous oxide emission factor ($EF(\%) = \text{nitrous oxide flux/nitrate inflow} \times 100\%$) of natural wetlands. *Overall EF_5 estimated assuming 70% of nitrate reduction efficiency.

Reference	Country	System	Nitrate inflow g N/m ² /y	Nitrous oxide flux g N/m ² /y	EF_{5g} (%)	Overall EF_5 (%)
Hefting (2003)	The Netherlands	Forested riparian zone	630	2	0.32	0.47*
		Grassland riparian zone	270	0.3	0.11	0.26*
Muelherr and Hiscock, 1997	England	Wetland			0.15	0.30*
Hiscock et al. (2003)	England	Wetland			0.19	0.34*
	England/Scotland	Wetland			0.17	0.32*
Ueda et al. (1991)	Japan	Wetland			0.23	0.38*
Ronen et al. (1988)	Israel	Wetland			0.25	0.40*
Minami and Ohsawa (1990)	Japan	Wetland			0.08	0.23*
Dowdell et al. (1979)	England	Wetland			0.55	0.70*

EF_{5g} = emission factor of nitrous oxide, represented by the nitrous oxide emitted to the atmosphere (surface fluxes) as well as nitrous oxide that was diluted in water leaving the wetland or bioreactor.

Overall EF_5 = emission factor of nitrous oxide, represented by sum of the nitrous oxide emitted/diluted in water leaving the wetland or bioreactor (EF_{5g}), with the nitrous oxide lost downstream in rivers and estuaries, ($EF_{5r,e}$ of 0.25% each).

*Table 2. Summary of published results on inflow nitrate-N loading, nitrous oxide emissions and the nitrous oxide emission factor (EF(%)= nitrous oxide flux/nitrate inflow x 100%) of different constructed wetland systems. VSSF=vertical subsurface; HSSF=horizontal subsurface; FWS=free water surface. * Overall EF₅ estimated assuming 70% of nitrate reduction efficiency.*

Reference	Country	System	Nitrate inflow mg N/L	Nitrous oxide flux mg N/m²/h	EF_{5g} (%)	Overall EF₅ (%)
Teiter and Mander (2005)	Estonia	VSSF	50.9	0.225	0.02	0.17*
Mander et al. (2003)	Estonia	HSSF	109	0.186	0.45	0.60*
Søvik and Kløve (2007)	Norway	FWS	38	0.130	0.13	0.28*
Johansson et al. (2003)	Sweden	FWS	8	0.112	0.17	0.32*
Søvik et al. (2006)	Finland	FWS	59.7-66.1	0.057	0.08	0.23*
	Finland	FWS	1.4	0.001	0.07	0.22*
	Finland	HSSF	1.8	0.005	0.47	0.62*
	Norway	FWS	43.4	0.068	0.04	0.19*
	Norway	VSSF	52.6	0.200	0.01	0.16*
Ström et al. (2007)	Sweden	FWS	75	0.230	0.11	0.26*
Gui et al. (2007)	Japan	FWS	73.5	0.079	0.06	0.21*
	Japan	VSSF	73.5	0.123	0.10	0.25*
Zhou et al. (2020)	China			0.480	0.11	0.26*
Liu et al. (2009)	USA	FWS	100	0.200	0.12	0.27*
	Japan	VSSF	100	0.073	0.04	0.19*
Wu et al. (2009)	China	FWS	49-55	0.350	0.25	0.40*
VanderZaag et al. (2010)	Canada	FWS	306	0.250	0.12	0.27*
	Canada	HSSF	306	0.396	0.20	0.35*
Inamori et al. (2007)	Japan	VSSF	307	0.022	0.003	0.15*
Inamori et al. (2008)	Japan	VSSF	308	0.287	0.01	0.16*
Wang et al. (2008)	Japan	VSSF	309	0.072	0.04	0.19*
Liikanen et al. (2006)	Finland	HSSF	310	0.017	1.15	1.30*
Fey et al. (1999)	Germany	HSSF	73	0.133	0.07	0.22*

Table 3. Summary of published results on inflow nitrate-N loading, nitrous oxide emissions, dissolved nitrous oxide and the nitrous oxide emission factor (EF(%)= nitrous oxide flux/nitrate inflow x 100%) of different bioreactor systems. WS= Woodchip on the surface; SS= Soil on the surface. *Overall EF₅ estimated assuming 70% of nitrate reduction efficiency.

Reference	Country	System	Nitrate inflow	Nitrous oxide flux	Nitrous oxide dissolved	EF _{5g} (%)	Overall EF ₅ (%)
Greenan et al. (2009)	EUA	Woodchip wall	580 mg N/kg wood	0.019 mg N/kg wood		0.003	0.15*
		Woodchip wall	1320 mg N/kg wood	0.085 mg N/kg wood		0.006	0.16*
		Woodchip wall	1390 mg N/kg wood	0.299 mg N/kg wood		0.022	0.17*
		Woodchip wall	3080 mg N/kg wood	0.236 mg N/kg wood		0.008	0.16*
Moorman et al. (2010)	USA	Woodchip wall	10 mg N/L (77% efficiency)			0.62	0.85
		Soil Control	10 mg N/L (51% efficiency)			0.39	0.88
Elgood et al. (2010)	Canada	Woodchip bed	2.8 mg N/L (92% efficiency)		0.0064 mg N/L	0.23	0.31
Christianson et al. (2013)	USA	Woodchip bed/WS	1250 mg N/h (56% efficiency)	0.055 mg N/h	0.675 mg N/h	0.13	0.57
		Woodchip bed/ SS	1250 mg N/h (56% efficiency)	0.0025 mg N/h	0.065 mg N/h	0.01	0.45
Warneke et al. (2011)	NZ	Woodchip bed	132 kg N	99.58 g N/d	362 g N/d	0.35	0.50*
Rivas et al. (2020)	NZ	Woodchip	3-8.5 mg N/L (96% efficiency)	0.06 mg N/L		1.0	1.04
		Woodchip	6.4-23.4 mg N/L (80% efficiency)	0.04-0.307 mg N/L		1.4	1.60
Burbery et al. (2020)	NZ	Woodchip	6 -7 mg N/L		0.006-0.008 mg N/L	0.11	0.26*
Bock et al. (2018)	USA	Woodchip	0.052 g N/d	0.00024 g N/d		0.46	0.61*
		Woodchip	0.026 g N/d	0.00011 g N/d		0.43	0.58*
		Woodchip	0.013 g N/d	0.00012 g N/d		0.91	1.06*

5. Conclusions

The results obtained in this review show that the nitrous oxide emission factors from wetlands and bioreactors are very low, and well below the default EF₅ values suggested by IPCC for nitrous oxide emissions from leached nitrate. The results of our study therefore suggest that the potential for pollution swapping in wetlands and denitrifying bioreactors is unlikely.

6. Acknowledgements

We thank DairyNZ Ltd for funding this review.

7. References

- Bock EM, Coleman BSL, Easton ZM. 2018. Effect of biochar, hydraulic residence time, and nutrient loading on greenhouse gas emission in laboratory-scale denitrifying bioreactors. *Ecological Engineering* 120: 375-383.
- Burbery L, Sarris T, Mellis R, Abraham P, Sutton R, Finnemore M, Close M. 2020. Woodchip denitrification wall technology trialled in a shallow alluvial gravel aquifer. *Ecological Engineering* 157: 105996.
- Christianson L, Hanly J, Jha N, Saggar S, Hedley M. Denitrification bioreactor nitrous oxide emissions under fluctuating flow conditions.
- Cooke J, Rutherford K, Wilcock B, Matheson F. 2018. *Significance of wetlands in the agricultural landscape as sources of nitrous oxide emissions. A review and synthesis of hypotheses.*
- Davis MP, Martin EA, Moorman TB, Isenhardt TM, Soupir ML. 2019. Nitrous oxide and methane production from denitrifying woodchip bioreactors at three hydraulic residence times. *Journal of Environmental Management* 242: 290-297.
- de Klein AM, Pinares-Patino C, Waghorn GC. 2008. Greenhouse gas emissions. *Environmental Impacts of Pasture-Based Farming*, pp. 1-32.
- Dowdell RJ, Burford JR, Crees R. 1979. Losses of nitrous oxide dissolved in drainage water from agricultural land. *Nature* 278: 342-343.
- Elgood Z, Robertson WD, Schiff SL, Elgood R. 2010. Nitrate removal and greenhouse gas production in a stream-bed denitrifying bioreactor. *Ecological Engineering* 36: 1575-1580.
- Fey A, Benckiser G, Ottow JCG. 1999. Emissions of nitrous oxide from a constructed wetland using a groundfilter and macrophytes in waste-water purification of a dairy farm. *Biology and Fertility of Soils* 29: 354-359.
- Greenan CM, Moorman TB, Parkin TB, Kaspar TC, Jaynes DB. 2009. Denitrification in wood chip bioreactors at different water flows. *J Environ Qual* 38: 1664-1671.
- Gui P, Inamori R, Matsumura M, Inamori Y. 2007. Evaluation of constructed wetlands by wastewater purification ability and greenhouse gas emissions. *Water Science and Technology* 56: 49-55.

- Healy MG, Ibrahim TG, Lanigan GJ, Serrenho AJ, Fenton O. 2012. Nitrate removal rate, efficiency and pollution swapping potential of different organic carbon media in laboratory denitrification bioreactors. *Ecological Engineering* 40: 198-209.
- Healy MG, Barrett M, Lanigan GJ, João Serrenho A, Ibrahim TG, Thornton SF, Rolfe SA, Huang WE, Fenton O. 2015. Optimizing nitrate removal and evaluating pollution swapping trade-offs from laboratory denitrification bioreactors. *Ecological Engineering* 74: 290-301.
- Hefting MM. 2003. *Nitrogen transformation and retention in riparian buffer zones*. Unpublished thesis.
- Hill AR. 1996. Nitrate Removal in Stream Riparian Zones. *Journal of Environmental Quality* 25: 743-755.
- Hiscock KM, Bateman AS, Mühlherr IH, Fukada T, Dennis PF. 2003. Indirect Emissions of Nitrous Oxide from Regional Aquifers in the United Kingdom. *Environmental Science & Technology* 37: 3507-3512.
- Inamori R, Gui P, Dass P, Matsumura M, Xu KQ, Kondo T, Ebie Y, Inamori Y. 2007. Investigating CH₄ and N₂O emissions from eco-engineering wastewater treatment processes using constructed wetland microcosms. *Process Biochemistry* 42: 363-373.
- Inamori R, Wang Y, Yamamoto T, Zhang J, Kong H, Xu K, Inamori Y. 2008. Seasonal effect on N₂O formation in nitrification in constructed wetlands. *Chemosphere* 73: 1071-1077.
- IPCC. 2006. 2006 IPCC guidelines for National Greenhouse Gas Inventories, prepared by the National Greenhouse Gas Inventories Programme. In: Eggleston, H.S., Buendia, L., Miwa, K., Ngara, T., Tanabe, K. (Eds.), 2006 IPCC Guidelines for National Greenhouse Gas Inventories. Published: IGES, Japan.
- IPCC. 2019. *2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories*, Available at: https://www.ipcc-nggip.iges.or.jp/public/2019rf/pdf/4_Volume4/19R_V4_Ch11_Soils_N2O_CO2.pdf.
- Johansson AE, Kasimir Klemedtsson Å, Klemedtsson L, Svensson BH. 2003. Nitrous oxide exchanges with the atmosphere of a constructed wetland treating wastewater: Parameters and implications for emission factors. *Tellus, Series B: Chemical and Physical Meteorology* 55: 737-750.
- Liikanen A, Huttunen JT, Karjalainen SM, Heikkinen K, Väisänen TS, Nykänen H, Martikainen PJ. 2006. Temporal and seasonal changes in greenhouse gas emissions from a constructed wetland purifying peat mining runoff waters. *Ecological Engineering* 26: 241-251.
- Liu C, Xu K, Inamori R, Ebie Y, Liao J, Inamori Y. 2009. Pilot-scale studies of domestic wastewater treatment by typical constructed wetlands and their greenhouse gas emissions. *Frontiers of Environmental Science & Engineering in China* 3: 477.
- Mander Ü, Kuusemets V, Lõhmus K, Muring T, Teiter S, Augustin J. 2003. Nitrous oxide, dinitrogen and methane emission in a subsurface flow constructed wetland. *Water Science and Technology* 48: 135-142.
- Minami K, Ohsawa A. 1990. Emission of nitrous oxide dissolved in drainage water from agricultural land. *John Wiley & Sons*: 503-509.
- Moorman TB, Parkin TB, Kaspar TC, Jaynes DB. 2010. Denitrification activity, wood loss, and N₂O emissions over 9 years from a wood chip bioreactor. *Ecological Engineering* 36: 1567-1574.

- Rivas A, Barkle G, Stenger R, Moorhead B, Clague J. 2020. Nitrate removal and secondary effects of a woodchip bioreactor for the treatment of subsurface drainage with dynamic flows under pastoral agriculture. *Ecological Engineering* 148: 105786.
- Robertson WD, Cherry JA. 1995. In Situ Denitrification of Septic-System Nitrate Using Reactive Porous Media Barriers: Field Trials. *Groundwater* 33: 99-111.
- Robertson WD, Merkley LC. 2009. In-stream bioreactor for agricultural nitrate treatment. *Journal of environmental quality* 38: 230-237.
- Ronen D, Magaritz M, Almon E. 1988. Contaminated aquifers are a forgotten component of the global N₂O budget. *Nature* 335: 57-59.
- Schipper LA, Robertson WD, Gold AJ, Jaynes DB, Cameron SC. 2010. Denitrifying bioreactors—An approach for reducing nitrate loads to receiving waters. *Ecological Engineering* 36: 1532-1543.
- Søvik AK, Augustin J, Heikkinen K, Huttunen JT, Necki JM, Karjalainen SM, Kløve B, Liikanen A, Mander Ü, Puustinen M, Teiter S, Wachniew P. 2006. Emission of the greenhouse gases nitrous oxide and methane from constructed wetlands in Europe. *Journal of Environmental Quality* 35: 2360-2373.
- Søvik AK, Kløve B. 2007. Emission of N₂O and CH₄ from a constructed wetland in southeastern Norway. *Science of The Total Environment* 380: 28-37.
- Ström L, Lamppa A, Christensen TR. 2007. Greenhouse gas emissions from a constructed wetland in southern Sweden. *Wetlands Ecology and Management* 15: 43-50.
- Teiter S, Mander Ü. 2005. Emission of N₂O, N₂, CH₄, and CO₂ from constructed wetlands for wastewater treatment and from riparian buffer zones. *Ecological Engineering* 25: 528-541.
- Ueda S, Ogura N, Wada E. 1991. Nitrogen stable isotope ratio of groundwater N₂O. *Geophysical Research Letters* 18: 1449-1452.
- VanderZaag AC, Gordon RJ, Burton DL, Jamieson RC, Stratton GW. 2010. Greenhouse Gas Emissions from Surface Flow and Subsurface Flow Constructed Wetlands Treating Dairy Wastewater. *Journal of Environmental Quality* 39: 460-471.
- Wang Y, Inamori R, Kong H, Xu K, Inamori Y, Kondo T, Zhang J. 2008. Nitrous oxide emission from polyculture constructed wetlands: Effect of plant species. *Environmental Pollution* 152: 351-360.
- Warneke S, Schipper LA, Bruesewitz DA, McDonald I, Cameron S. 2011. Rates, controls and potential adverse effects of nitrate removal in a denitrification bed. *Ecological Engineering* 37: 511-522.
- Woli KP, David MB, Cooke RA, McIsaac GF, Mitchell CA. 2010. Nitrogen balance in and export from agricultural fields associated with controlled drainage systems and denitrifying bioreactors. *Ecological Engineering* 36: 1558-1566.
- Wu J, Zhang J, Jia W, Xie H, Gu RR, Li C, Gao B. 2009. Impact of COD/N ratio on nitrous oxide emission from microcosm wetlands and their performance in removing nitrogen from wastewater. *Bioresource Technology* 100: 2910-2917.
- Zhou S, Wang C, Liu Ce, Sun H, Zhang J, Zhang X, Xin L. 2020. Nutrient removal, methane and nitrous oxide emissions in a hybrid constructed wetland treating anaerobic digestate. *Science of The Total Environment* 733: 138338.

8. Appendix

Summary of published results on nitrate inflow loading, nitrous oxide fluxes and dissolved nitrous oxide dissolved in different bioreactor systems (HRT=hydraulic retention time).

Reference	Country	System	Nitrate inflow	Nitrous oxide flux	Nitrous oxide dissolved
Healy et al. (2012)	Ireland	Woodchip bed	19.5 - 32.5 mg N/L	Nil	1.24 g N/m ² /d
		Cardboard bed		Nil	0.08 g N/m ² /d
		Pine needles bed		3.21 g N/m ² /d	0.17 g N/m ² /d
		Barley straw bed		0.72 g N/m ² /d	0.47 g N/m ² /d
		Soil - control		1.56 g N/m ² /d	0.39 g N/m ² /d
Healy et al. (2015)	Ireland	Woodchip bed- 3h HRT	20 - 29.6 mg N/L	0.57 g N/m ² /d	
		Cardboard bed- 3h HRT		0.04 g N/m ² /d	
		Pine needles bed - 3h HRT		0.1 g N/m ² /d	
		Barley straw bed - 3h HRT			
		Woodchip bed - 5h HRT		1.48 g N/m ² /d	
		Cardboard bed - 5h HRT		0.02 g N/m ² /d	
		Pine needles bed - 5h HRT		0.09 g N/m ² /d	
		Barley straw bed - 5h HRT			
		Woodchip bed - 10h HRT		3.29 g N/m ² /d	
		Cardboard bed - 10h HRT		0.69 g N/m ² /d	
		Pine needles bed - 10h HRT		4.11 g N/m ² /d	
		Barley straw bed - 10h HRT		0.02 g N/m ² /d	
Woli et al. (2010)	USA	Woodchip bed	2.80 -18.9 mg N/L	0.01 - 0.13 mg N/m ² /h	0.004% of NO ₃ ⁻ removed
Davis et al. (2019)	USA	Woodchip bed - 2h HRT		478.4 mg N/m ³ /d	5.19% of NO ₃ ⁻ removed
		Woodchip bed - 8h HRT		28.9 mg N/m ³ /d	0.35% of NO ₃ ⁻ removed
		Woodchip bed- 16h HRT		36.6 mg N/m ³ /d	0.52% of NO ₃ ⁻ removed